



## VRLA Rechargeable Battery

# BP5-6 (BP5-6FR)

### FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- Absorbent Glass Mat technology for efficient gas recombination
- Its design life is up to 8 years in floating application

### APPLICATION

- UPS
- Emergency Lights
- Electronic Toy-Cars
- Fans
- Rechargeable Flashlights



### SPECIFICATIONS


Nominal Voltage	6V	
Nominal Capacity	20 Hour Rate (250mA, 5.25V)	5.00 Ah
	10 Hour Rate (475mA, 5.25V)	4.75 Ah
	5 Hour Rate (850mA, 5.25V)	4.25 Ah
	1 Hour Rate (3000mA, 4.65V)	3.00 Ah
Approx. Weight	950g(2.09lbs.)	
Terminals	T1 (Faston Tab 187) T2 is optional	
Max. Discharge Current	75 A (5 sec.)	
Max. Charge Current	1.50 A	
Operating Temperature Range	Charge	0°C~40°C(32°F~104°F)
	Discharge	-20°C~50°C(-4°F~122°F)
	Storage	-20°C~40°C(-4°F~104°F)
Self Discharge	< 3% per month (25°C)	
Internal Resistance	≤ 13.5mΩ (Fully Charged )	

### CONTAINER MATERIAL


- BP5-6:  
ABS: UL 94-HB (Dark gray color)
- BP5-6FR:  
ABS: UL 94-V0 (Light gray color)

 ISO 9001	 ISO 14001
 MH19884 UL	 CAM20310-2474-E-16 CE
● IEC 61056-1	● JIS C 8702-1
● GB/T 19639.1	


OUTER DIMENSIONS mm(inch)	Length (L)	Width (W)	Container Height (H)	Total Height (TH)
	70±1.5(2.76±0.06)	48±1.5(1.89±0.06)	102±1.5(4.02±0.06)	107±2.0(4.21±0.08)

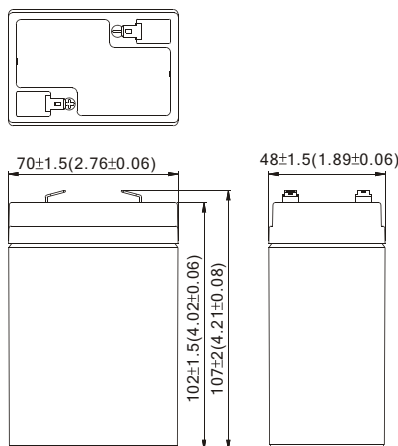


### TERMINAL TYPE

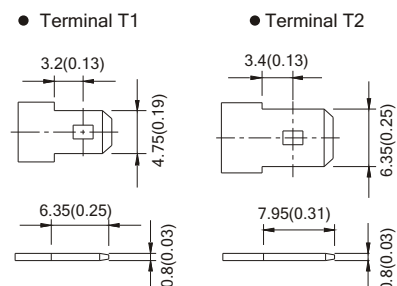

**BP5-6 (BP5-6FR) discharge characteristics (25°C /77°F)**

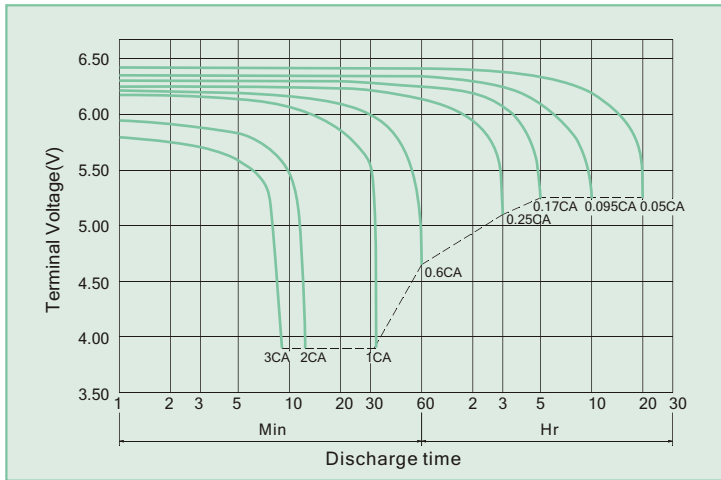


**Battery Charging Characteristics**

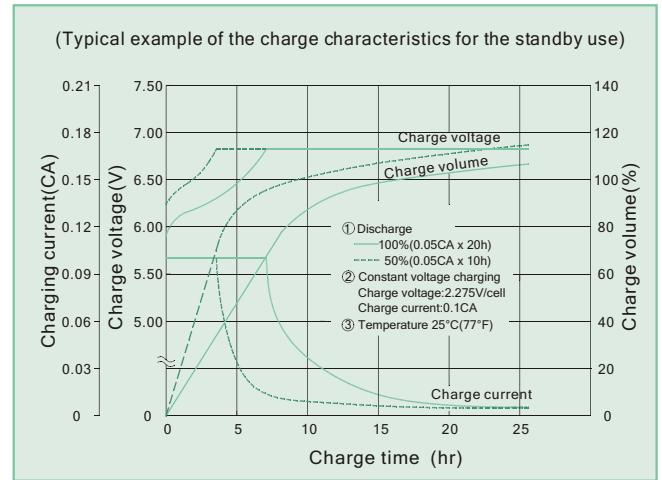

**Charging Procedure**

Application	Charging method	Charging Voltage at 25°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C /cell)	Max. charging current (CA)	Charging time 0.1CA, 25°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power Source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	

**Effect Of Temperature On Long Term Float Life**

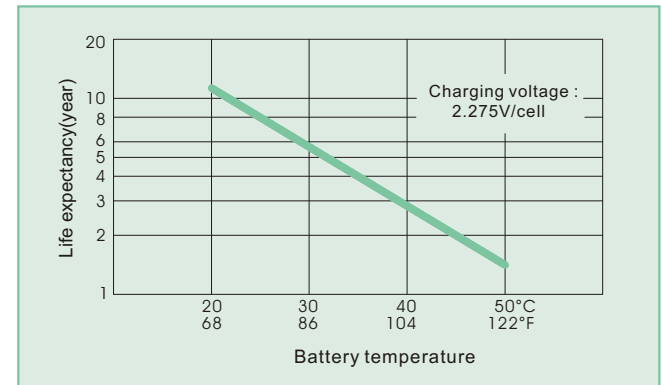

**Constant power discharge characteristics at 25 °C/77 °F Unit: W**

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	90.4	66.5	53.3	31.7	18.20	7.29	5.02	2.808	1.478
1.75V	104.6	72.1	55.8	32.9	18.74	7.43	5.10	2.850	1.500
1.70V	111.2	74.7	57.5	33.7	19.08	7.50	5.13	2.864	1.506
1.65V	116.2	76.5	58.8	34.2	19.31	7.55	5.15	2.873	1.512
1.60V	120.0	78.0	60.0	34.5	19.50	7.60	5.16	2.873	1.512

**Constant current discharge characteristics at 25 °C/77 °F Unit: A**

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	16.29	11.71	9.27	5.38	3.06	1.21	0.837	0.468	0.246
1.75V	19.20	12.69	9.70	5.58	3.15	1.24	0.850	0.475	0.250
1.70V	20.40	13.15	10.00	5.71	3.21	1.25	0.855	0.477	0.251
1.65V	21.31	13.46	10.23	5.79	3.24	1.26	0.858	0.479	0.252
1.60V	22.02	13.73	10.43	5.85	3.28	1.27	0.860	0.479	0.252

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.

A/3 REV. Dec. 2010

**USA:**  
 B&B BATTERY(USA) INC.  
 6415 RANDOLPH ST.COMMERCE, CA,90040 U.S.A.  
 TEL:1-323-278-1900.1-800-278-8599  
 FAX:1-323-278-1268  
 E-Mail:sales@bb-battery.com

**CHINA FACTORY:**  
 B. B. BATTERY CO., LTD.  
 CHENG DONG TRIAL AREA,HUANG GANG,  
 RAOPING, GUANG DONG,CHINA,515700  
 TEL:86-768-7601001-2  
 FAX:86-768-7601469  
 E-Mail:maggy@bb-battery.com

**EUROPE:**  
 B&B BATTERY(EUROPE) B.V.  
 SUITE 8, HAAKSBERGWEG 33, 1101  
 BP AMSTERDAM, THE NETHERLANDS  
 TEL: 31-30-3200190  
 MOBILE: 886-933896989  
 E-Mail: gary@bb-battery.com

**HONG KONG:**  
 B&B BATTERY(Hong Kong) Co.  
 TEL:852-2311-4918  
 FAX:852-2739-1182  
 E-Mail:bbhk@hkstar.com

**JAPAN:**  
 B&B BATTERY(JAPAN) CO., LTD.  
 1375-11 NARAHARA-MACHI,HACHIOJI,  
 TOKYO 193-0803,JAPAN.  
 TEL:81-426-25-6375  
 FAX:81-426-25-6375  
 E-Mail:miyata@bb-battery.com

**TAIWAN:**  
 B. B. BATTERY(TAIWAN) CO., LTD.  
 TEL:886-6-502-5150  
 FAX:886-6-589-8087  
 E-Mail:kevin@bb-battery.com